




Thk Environmental Axis.

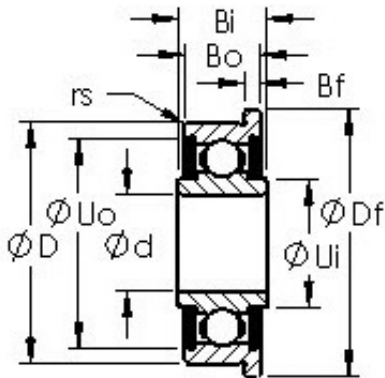

AST SFRW6-2RS Cojinetes de bolas profundas

Bearing No. SFRW6-2RS

Bore Diameter	9,525 mm
Outer Diameter	22,225 mm
Bearing Type	Flanged Sealed with Extended Inner
Bore Dia (d)	0.3750
Outer Dia (D)	0.8750
Outer Width (Bo)	0.2812
Inner Width (Bi)	0.3124
Radius (min) (rs)	0.016
Flange Dia (Df)	0.9650
Flange Width (Bf)	0.062
Dynamic Load Rating (Cr)	637
Static Load Rating (Cor)	256
Max Speed (Grease) (X1000 RPM)	32
Max Speed (Oil) (X1000 RPM)	38
Max. Shaft Shoulder Dia. Inner (Ui)	0.5
Min. Housing Shoulder Dia., Outer (Uo)	0.784
Ball Qty	7
Ball Dia (Dw)	0.1563
Weight (g)	12.90
Precision	A1
Standard Clearance	K25
Material	Martensitic Stainless Steel

SFRW6-2RS Bearing 2D drawings and 3D CAD models