




Thk Environmental Axis.

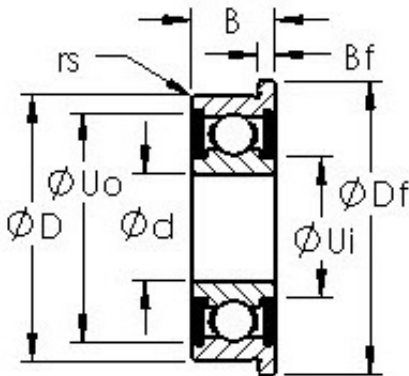

AST F684H-2RS Cojinetes de bolas profundas

Bearing No. F684H-2RS

| | |
|--|-----------------------------|
| Size | 4x9x4 mm |
| Bore Diameter | 4 mm |
| Outer Diameter | 9 mm |
| Width | 4 mm |
| Bearing Type | Flange Sealed |
| Bore Dia (d) | 4.0000 |
| Outer Dia (D) | 9.0000 |
| Width (B) | 4.0000 |
| Radius (min) (rs) | 0.100 |
| Flange Dia (Df) | 10.3000 |
| Flange Width (Bf) | 1.000 |
| Dynamic Load Rating (Cr) | 545 |
| Static Load Rating (Cor) | 182 |
| Max Speed (Grease) (X1000 RPM) | 53 |
| Max Speed (Oil) (X1000 RPM) | 63 |
| Max. Shaft Shoulder Dia. Inner (Ui) | 5.2 |
| Min. Housing Shoulder Dia., Outer (Uo) | 8.100 |
| Ball Qty | 7 |
| Ball Dia (Dw) | 1.5880 |
| Weight (g) | 1.15 |
| Precision | A1 |
| Standard Clearance | K25 |
| Material | Martensitic Stainless Steel |

F684H-2RS Bearing 2D drawings and 3D CAD models